

AN ISO 9001 : 2015 CERTIFIED COMPANY



Lubricants



POWERFUL

WORLD-CLASS

SMOOTH

A Silken Route For
A Successful Journey



ABOUT US

Business races are won with the lubrication of quality and service.

We at J K Enterprise have been making your journeys smooth with our range of quality lubricants suitable for various purposes. Being built on the strong foundation of quality, performance and economy we try and achieve the ultimate goal of customer satisfaction. They were our unmatched technology and our philosophy of great services, that kept us ahead in the age of neck to neck competition within a span as short as just 3 years. Quality has been a great fuel for our journey and we are committed to maintain the quality norms like API, JASO SAE and an ISO 9001:2015 certification. This is the reason we could bag a range of reputed customers to our credit...

We have been surging ahead with our extra ordinary brand of lubricants - **Novito®**. This epitome brand is blend of world class know-how, extensive research and of course the unparalleled human touch. The back bone of our research have been you-our esteemed customers. Your continuous feedbacks, automotive technicians and utility on Indian roads-both in urban as well as in rural -have been a great help in developing these products.

Our humble beginning as a mere trader, fourteen years ago, for international brands helped us sensing the urge to reach and address the rural consumer. This inspired us to launch our own brand. Extensive market research along with technical consultancy from peers of the industry and support from our existing customer base spread all over the country worked as our zest.

This 'all weather brand' is at par with the ever changing Indian conditions. Our research and development team always keeps close contact with our technology partners and consultants and try to upgrade the products as per the specific needs. This innovation goes ahead in using high quality additives for reducing engine wear & tear, ensuring low ash, providing nano-thin coating on piston cylinders with controlled deposits for a smooth and clean engine performance. Our world class lubricant brand **Novito®**. come at a very competitive prices too!

OUR VISION

Our quality brand **Novito®**. have been crafted with a very wide vision of catering to our teeming millions, both in metros and the vast hinterland. Our ongoing goal is to touch every doorstep, within a fixed time with our quality products of international standards.

OUR MISSION

"A mission is to create far sighted minds"

Yes, minds. Because you never think alone.

AS we all are parts of a very intricately woven social fabric. living in times of unwarranted changes where alertness is the prime key for survival. Simply because, mineral oils derivatives of crude petroleum is fast depleting and global prices are moving up and so is global warming. Therefore it becomes a challenge to provide mineral based lubricants and slowly formulating synthetic varieties at economical prices. Still, we are well into it. We are trying to provide world class lubricants to take care of your mechanical moving parts, your wallets and our environment.

On the social platform, we are providing, albeit in a small way, direct employment, indirect employment and business opportunities to our youth. Our sales programmes have been keeping pace with the vision of our central and state governments as we are providing a wide gateway of self employment to our rural youth.

"Grow and let grow".

This is the motto we are marching with. The more we sell, the more we invest, the more we employ and thus more we grow. Come give us your helping hand in partnering this revolution. A revolution that covers we, you and us. We all can usher to alleviate national poverty by providing a veritable platform for self employment and eventually contribute to our Gross Domestic Product as well as raise the per capita incomes in impoverished homes in India's hinterland, the unseen, but not unfelt, bosom of our nativity.

"Come join us; it is now a national priority and a global mission."



A KEEN **EYE** ON **QUALITY**



Being at the forefront of lubricant market, we always bring high quality products to cater the growing demands of our customers. To exceed their expectations, we strictly maintain quality by way of following the standards of ISO 9001:2015 environment. All these products are manufactured in hygienic environment and are packed by using ultramodern automatic machines. The best raw material, sourced from the refineries in the Gulf, North West European oil fields and from our domestic outlets, ensure the continuous quality.

We have technical know-how from global leader in lubricant additives.

Towards A **Greener** Planet



We have always been keeping this in mind that the earth is our last and only home and let's keep it a place worth living for generations. We take our share in it by promoting recycling wastes, preventing pollution, controlling exhaust emissions and several others.

Not only our manufacturing process of **Novito**[®] is developed by keeping these things in mind but also to meet the modern engine lubrication requirements.

Road Craft 20w40

Road Craft 20w40 is premium quality, heavy duty multigrade engine oil, meeting API: CF-4 performance requirements. It is blended from selected highly refined base oils and contain an additive package with antioxidant, antiwear, anticorrosion, detergent, dispersant and antifoam agents, to suit petrol and diesel engines. It can combat corrosive wear that may result by using high sulphur fuels; due to its good built-in alkaline reserves.

APPLICATIONS : Recommended for Naturally aspirated / super charged, turbo charged, diesel engines & gasoline engines, operating with high ring zone temperatures, under severe duty conditions.

PERFORMANCE LEVEL : IS 13656-2002 (E-DL3 / E-PL2), MIL-L-2104D and API : CF-4 & MACK T-8A specifications.



PACKING SIZE ▶



500ml, 1L, 2L, 3L, 3.5L, 5L, 7.5L, 10L, 20L, 26L, 50L, 210L



Excell Turbo 15w40

Excell Turbo 15w40 is high quality multigrade engine oil, meeting API : CF-4 performance requirements, formulated from selected high quality group III base oils and additives, to suit petrol and diesel engines, operating under severe duty conditions.

APPLICATIONS : Recommended for commercial road transport and off highway vehicles applications, Power shift transmissions and mobile hydraulic systems, New generation automotive vehicles.

PERFORMANCE LEVEL : IS 13656-2002 (E-DL5/ E-PL4), CCMC D5, US MILITARY MIL-L-2104 E, API : CF-4, ACEA E2/B3, VOLVO VDS & C4 of Detroit Allison specifications.

500ml, 1L, 2L, 3L, 3.5L, 5L, 7.5L, 10L, 20L, 26L, 50L, 210L



◀ **PACKING SIZE**

Green 5G (CNG/LPG) 20W50

Green 5G 20W50 is super-premium multigrade oil for gasoline / diesel engines, meeting API : SL, performance requirements. This is made from highly refined Group II base oils and selected additives to keep the engine easy start in all weather conditions. Due to excellent oxidation and nitration resistance, it extends the oil drain interval reducing the operation cost.

APPLICATIONS : Recommended for the modern petrol engine passenger cars and can also be used in cars using CNG/LPG as fuel.

PERFORMANCE LEVEL : IS 13656 -2002 (EPL4/ E-DL3), API: SL specifications.



PACKING SIZE ▶



1L, 2L, 3L, 3.5L,

Tractor Special

Tractor Special is multigrade engine oil, meeting API : CF-4 performance requirements; specially formulated after extensive research & development work for use in tractor engines, experiencing greater torque and load.

APPLICATIONS : Recommended for Diesel tractors from Escorts, FORD, HMT, Hindustan, Eicher, Swaraj, Mahindra, Massey Ferguson makes etc. and earth movers, operating under severe duty conditions in field and on roads viz heat, dust, cold, heavy loading etc.

PERFORMANCE LEVEL : IS 13656-2002 (E-DL3), US MILITARY MIL-L 2104C, API : CF-4 and exceeds MACK T-7 specifications.



PACKING SIZE ►



7.5L, 10L

UTTO

UTTO is a premium quality of multipurpose universal tractor transmission oil blended from high quality hydro cracked base oils. The product is doped with tailor made additives specifically used for wet brake, hydraulic, clutch & transmission system in today's farm tractors & construction machinery. The oil has high oxidation stability, good thermal stability, excellent seal compatibility & high protection against rust & corrosion.

APPLICATIONS : Recommended for use in transmission, hydraulic & wet brake systems of tractors & construction machinery suitable for new generation tractors having oil immersed brakes, Tractors of Mahindra & Mahindra, Eicher, TAFE, SAME having wet brake systems.

PERFORMANCE LEVEL : Meets John Deere J20C, J20D, Ford New Holland M2C 134D, Massey Ferguson M1110, 1127 (A&B), Allison C-4 & C 3, Caterpillar TO-2 specifications.



5L, 7.5L, 10L, 20L, 26L, 50L, 210L



◀ **PACKING SIZE**

Laala Ghoda (Pump Set Oil)

Laala Ghoda is a monograde engine oil, meeting API : SC/CF performance requirements. It is specially formulated from petroleum mineral oil, fortified with additives, to meet antiwear and foam inhibitor requirements of petrol/diesel pump sets used for agriculture applications.

APPLICATIONS : Recommended for stationary petrol/diesel engines, equipped with agriculture pump sets/ power generator sets, operating under moderate duty condition.

PERFORMANCE LEVEL : IS 13656-2002 (E-PL1/E-DL1), US MILITARY MIL-L-2104B and API : SC/CF specifications.



PACKING SIZE ►



3.5L, 5L

Gear EP-90 API GL - 4

Gear EP-90 is premium quality extreme pressure gear oil blended from highly refined, high viscosity base oils with good oxidation stability. This oil is also fortified with combinations of additives which provides outstanding load carrying properties, good anti foaming / anti wear characteristics for long term performance.

APPLICATIONS : Recommended for use in hypoid and spiral bevel gears operating under high-speed, low torque & low speed, high torque, moderately severe load conditions. May also be used for service top up of many run in final drive units initially filled with GL-4 type products.

PERFORMANCE LEVEL : IS 1118-1992 (EP TYPE GL-4), US MILITARY MIL-L-2105, API: GL-4 specifications.



PACKING SIZE ▶

500 ml, 1L, 5L, 10L, 20L, 26, 50L, 210L

Gear EP-140 API GL-4

Gear EP-140 is premium quality extreme pressure gear oil blended from highly refined, high viscosity base oils with good oxidation stability. This oil is also fortified with combinations of additives which provides outstanding load carrying properties, good anti foaming / anti wear characteristics for long term performance.

APPLICATIONS : Recommended for use in hypoid and spiral bevel gears operating under high-speed, low torque & low speed, high torque, moderately severe load conditions. May also be used for service top up of many run in final drive units initially filled with GL-4 type products.

PERFORMANCE LEVEL : IS 1118-1992 (EP TYPE GL-4), US MILITARY MIL-L-2105, API: GL-4 specifications.



500 ml, 1L, 5L, 10L, 20L, 26, 50L, 210L

◀ **PACKING SIZE**

Gear EP 80W90 API GL-5

Gear EP 80W90 is premium quality heavy duty multipurpose extreme pressure GL 5 type gear oil, blended from highly refined group I group II base oils with good oxidation stability. This oil is also doped with combinations of EP, antiwear additives to provide long running performance under severe duty conditions.

APPLICATIONS : Hypoid, spiral bevel, spur and double reduction rear axles of trucks, buses, tractors and earthmoving equipment on or off highway; manual gear boxes, auxiliary gear boxes and transfer boxes operating under severe duty conditions.

PERFORMANCE LEVEL : IS 1118-1992 (EP TYPE GL-5), US MILITARY MIL-L-2105D, API: GL-5 specifications.



PACKING SIZE ▶

500 ml, 1L, 5L, 10L, 20L, 26, 50L, 210L

Gear EP 85W140 APL GL-5

Gear EP 85W140 is premium quality heavy duty multipurpose extreme pressure GL-5 type gear oil, blended from highly refined group I group II base oils with good oxidation stability. This oil is also doped with combinations of EP, antiwear additives to provide long running performance under severe duty conditions.

APPLICATIONS : Hypoid, spiral bevel, spur and double reduction rear axles of trucks, buses, tractors and earthmoving equipment on or off highway; manual gear boxes, auxiliary gear boxes and transfer boxes operating under severe duty conditions.

PERFORMANCE LEVEL : IS 1118-1992 (EP TYPE GL-5), US MILITARY MIL-L-2105D, API: GL-5 specifications.



PACKING SIZE ►

500 ml, 1L, 5L, 10L, 20L, 26, 50L, 210L

Drive TQ

Drive TQ is a premium quality transmission oil having a low coefficient of friction to meet General Motors Type A Suffix A Specifications. This is blended with highly refined base oils and doped with selected additives which improves the life of transmission and steering system.

APPLICATIONS : Recommended for Lubrication of synchromesh gears and automatic and power steering units of automobiles and LCVs requiring Type A Suffix A fluid.

PERFORMANCE LEVEL : TES 122 of Detroit Diesel Allison, General Motors Type A Suffix A specifications.



500ml, 1L, 5L, 10L, 20L, 210L

◀ PACKING SIZE

Hydro Press 32 / 46 / 68

Hydro Press 32/46/68 Oil is manufactured from solvent refined high viscosity mineral oils having outstanding lubrication, anti-wear, anti-oxidant properties, anti-corrosion and anti-foam additive.

APPLICATIONS : Recommended for circulating and hydraulic systems, Pneumatically operated Equipments. Splash and ring oiling system of bearing and gears of industrial machinery.

PERFORMANCE LEVEL : DIN51524 PART 2, DENNISON HF.2, VICKERS-1-286-S



PACKING SIZE ►

1 L, 5L, 10L, 20L, 26L, 50L, 210L

4T-Plus

4T-Plus is premium quality multi-grade engine oil (SAE 20W40), formulated with Protective Synthetic Chemistry, specially developed to meet the requirements of high performance 4 stroke two and three wheelers. It provides strong oil film for lubrication and total protection to engine viz. protection from rust, corrosion, with reduced wear under a wide temperature range in air cooled new generation 4 stroke motorcycles.

APPLICATIONS : Recommended for all new generation 4 stroke , two wheelers, plying under severe duty conditions like frequent stop & go, dusty environment, variable climatic conditions etc. viz. Honda, Hero Honda, Bajaj, TVS, Yamaha, Suzuki, LML, Kinetic etc. and three wheelers also.

PERFORMANCE LEVEL : API SL Grade performance level & exceeds the stringent requirements of JASO: MA-2.



PACKING SIZE ►

900ml, 1L, 50L

Super Premium 4T-Plus 10W30

Super Premium 4T-Plus 10W30 is premium quality multi-grade engine oil (SAE 10W30), specially developed to meet the requirements of high speed 4 stroke air cooled engines of new generation motorcycles. It is formulated with ECG Protective Synthetic Chemistry, to provide total protection to Engine components, Clutch and Gear box.

APPLICATIONS : Recommended for all new generation 4 stroke, two wheelers, plying under severe duty conditions like frequent stop & go, dusty environment, variable climatic conditions etc. viz. Honda, Hero Honda, Bajaj, TVS, Yamaha, Suzuki, LML, Kinetic etc. and three wheelers also.

PERFORMANCE LEVEL : IS 13656-2002 (E-PL4), Exceeds most stringent performance requirements of JASO: MA-2 and API: SJ specifications.



900 ml

◀ PACKING SIZE

Global 2T

Global 2T is superior product developed for two stroke petrol engines & is blended from highly refined base oils, additives & a diluent to provide easy mixing with fuel. This product minimize spark plug fouling & pre ignition, prevent rusting & provide protection against scuffing, seizure & wear.

APPLICATIONS : Recommended for 2 stroke air cooled gasoline engines used in scooters, motor cycles, mopeds, three wheelers etc. and small equipment such as sprayers, pumps, generators, agro-implements like pesticide blowers, tillers, chain saws etc.

PERFORMANCE LEVEL : 2T POWER - EXCEEDS API : TC; 2T SUPREME - JASO: FC specifications.



PACKING SIZE ►

500ml, 1L

Breeze 5W30

Breeze 5W30 is a cost effective Semi-Synthetic Crank Case lubricant manufactured through oils produced by isomerization & hydro cracking process. It contains a balanced combinations of modern performance additives like antioxidants, VI Improvers, Antiwear, Extreme Pressure (EP) & metal deactivators which protects the engine against sludge & deposits. Its high viscosity index & low pour point provides optimum viscosity & fluidity across a wide range of temperatures.

APPLICATIONS : Recommended for modern day high performance cars running on Petrol / Diesel / CNG like Tata Motors, Hyundai Motors, Maruti, Datsun, Toyota, BMW, GM, Chevrolet, Ford etc.

PERFORMANCE LEVEL : Meets API SM/CF Grade performance level requirements



PACKING SIZE ►



3.5 Ltr, 4 Ltr, 5 Ltr

Moto Green 4t

Moto Green 4T is premium quality multi-grade engine oil (SAE 20W40), formulated with Trident Protective Synthetic Chemistry, specially developed to meet the requirements of high performance 4 stroke two and three wheelers. The special synthetic chemistry protects the engine from rust, corrosion, with reduced wear under a wide temperature range in air-cooled new generation 4 stroke motorcycles.

APPLICATIONS: Recommended for all new generation 4 stroke, two wheelers, plying under severe duty conditions like frequent stop & go, dusty environment, variable climatic conditions etc. viz. Honda, Hero Honda, Bajaj, TVS, Yamaha, Suzuki, LML, Kinetic etc. and three wheelers also.

PERFORMANCE LEVEL : IS 13656 – 2002 (E-PL4), Exceeds most stringent performance requirements of JASO: MA-2 and API: SL specifications.



900 ml



◀ PACKING SIZE

Iccy cool

Iccy cool are non-petroleum base engine coolants, formulated from ethylene glycol and special inhibitors, free from nitrite borates, silicates, phosphates & amines. It is the pure organic acid technology. It is used in all types of automotive vehicles/industrial engines' radiators, for protection against corrosion / deposits and ensure efficient heat transfer.

APPLICATIONS : Recommended for all kinds of petrol/diesel engine driven passenger cars, jeeps, vans, commercial vehicles and stationery engines operating with water as a cooling medium.

PERFORMANCE LEVEL : IS 5759-1994 specifications. ASTM D 4340-Corrosion of Cast Aluminium Alloys, ASTM D -1384-Corrosion test for Engine Coolants in Glassware.



PACKING SIZE ►



1 Ltr, 3 Ltr, 5 Ltr

OUR MARKETING STRATEGY

Marketing for a product range like ours has been quite a challenging job in this competitive arena. Lot of global players too are entering into the Indian market, Still we can bank on our proven quality as our USP. We cater to both, automobile and industrial sectors with our quality lubricants.

To cater to the automobile sector, we have set up a team of Marketing Executives who assists the Regional, Zonal as well as Taluka level distributors and retailers. They also play a great role in networking with automobile users and technicians and in educating them about product usage along with providing us with valuable feedbacks.

Industrial lubricants are another area of our operations and we are letting no effort to waste in providing a wide range of lubricants which are used in both low and high temperature operations and require infrequent replacements or top ups.

Mining, cement plants, steel plants, chemical plants, garment industry and food industry are some of the industries presently covered by us. The rural segment requires more attention and we are providing them with the necessary product mix to their satisfaction.

There's another segment that is also equally important and that is the farmer. An Indian farmer requires lubricants for a range of applications like engine oils for tractors, pumps motor bearings to harvesters. We try and reach his farms to a greater extent. Our unique concept is that we provide doorstep delivery to your nearest stockist.



PROLOGUE

It was a humble endeavor to introduce you with our activities and our products. Your valuable suggestions are most welcome. You may either write to us at the following address or Email us or simply call us on the corporate query number.

If you are interested to join our fast growing family of distributors and stockists, please free to contact us. We have a range of quality products for the automobile and the industrial sector. See what you get.

What Our Marketing Partners Get.....

- Handsome margins and benefits from promotional scheme
- Technical consultancy
- Sales support
- Easy exit and liquidity
- Reward policy to all categories of distributors


What our consumers in the automotive as well as the industrial sector get...

- Consistent Product Quality
- Doorstep delivery or at nearest outlet
- Grievance redressals
- Replacement of damaged products
- Quality... Performance... Economy...

What our bulk Industrial and Automobile consumers get...

- Doorstep delivery or at nearest outlet
- Technical advise/consultancy
- Attractive discounts on repeat orders or on bulk orders.
- Quality... Performance... Economy....



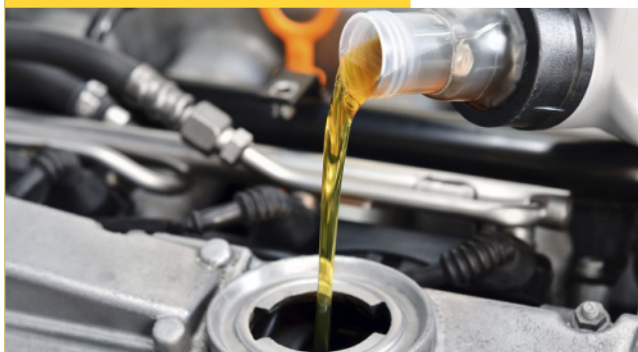

RESEARCH & DEVELOPEMENT



FACTORY




BLENDING



STORAGE TANKS

“Welcome to Novito family”

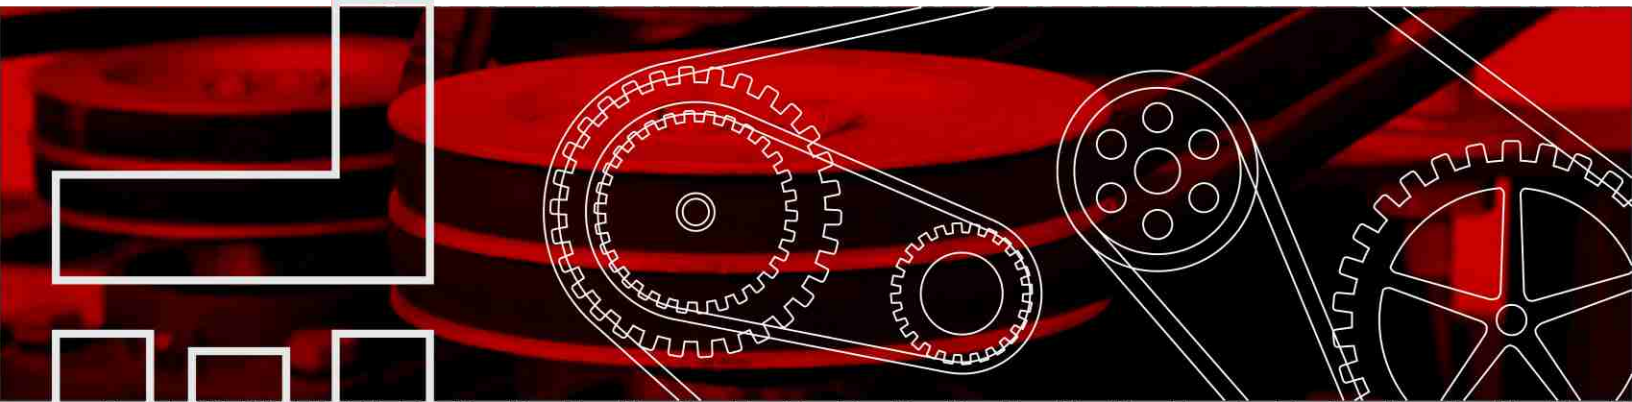

FREE SET INDUSTRIAL V-BELT



ROYAL PREMIUM

Magnum

FREE-SET INDUSTRIAL V-BELTS

What is V-Belt ?

V-belts are a type of power transmission belt with a trapezoidal cross-section, commonly used in industrial and automotive applications to transfer power from one pulley to another. They are known for their efficiency, reliability, and ease of use. The technology behind V-belts has evolved over the years to enhance their performance and durability. Here are some key aspects of V-belt technology:

Material : V-belts are typically made from rubber or synthetic materials, such as neoprene, which provide flexibility, wear resistance, and resistance to environmental factors.

Cord Construction : The cords inside V-belts play a crucial role in transferring power. They are often made of materials like polyester or aramid, and their arrangement, tension, and construction contribute to the belt's strength and flexibility.

Compound Formulations : The rubber compound used in V-belts may include additives to improve resistance to heat, oil, abrasion, and other environmental factors. Different formulations are designed for specific applications and operating conditions.

Cord Arrangements : The arrangement of cords within the belt, such as the angle and spacing, influences the belt's flexibility and load-carrying capacity.

Belt Profiles : V-belts come in various profiles, including classical V-belts (A, B, C, D, E, F etc.), narrow V-belts (SPZ, SPA, SPB, SPC, 3V, 5V, 8V), Pentagonal V-Belt (C) and specialty profiles. Each profile is designed for specific load and speed requirements.

Maintenance-Free Designs : Some V-belts are designed to be maintenance-free, reducing the need for re-tensioning over time. Self-tensioning systems and materials with low elongation contribute to this feature.

High-Temperature Resistance : Advanced V-belt technologies may include features to enhance resistance to high temperatures, making them suitable for applications where heat is a factor.

Precision Engineering : The manufacturing processes for V-belts involve precision engineering to ensure consistent dimensions, which is crucial for proper functioning and compatibility with pulley systems.

It's important to note that advancements in materials and manufacturing techniques continue to drive improvements in V-belt technology. When selecting V-belts for specific applications, it's recommended to follow the manufacturer's guidelines and specifications for optimal performance and

Construction V-Belt ?



01. Polyester Cotton Jacket

The cover is impregnated with a specially formulated neoprene synthetic rubber to ensure superior flexibility, better traction and high resistance to wear, oil, heat and static charge.

02. Topping Rubber

This withstands bending stress without fatigue.

03. HMLS Reinforcing Cords

These high modulus and low stretch polyester cords ensure higher power transmitting capacity and enable the belts to carry higher loads with minimum stretch.

04. Adhesive Rubber

The specially formulated synthetic rubber ply gives required adhesion to the cords, dissipates heat, resists frictions between cords and maintains cushioning effect.

05. Base Rubber

Specially designed stiff yet flexible crack-resistant compound. Maintains an even distribution of the load in the cord layer, preventing power loss and premature belt failure.


Range of V-Belt ?

Section - A	20 to 280 inch
Section - B	20 to 850 inch
Section - C	35 to 850 inch
Section - D	85 to 850 inch
Section - E	160 to 850 inch
Section - F	180 to 850 inch
Section - SPZ	1000 to 2000 mm
Section - SPA	1000 to 3300 mm
Section - SPB	1600 to 7200 mm
Section - SPC	1600 to 20000 mm
Section - 8V	135 to 850 inch
Section - Conical	65 to 800 inch

Features & Advantage


ROYAL PREMIUM V-Belts are match free belts subject to precise length control, do not require matching & any number of belts of the same size can be used to make a set.

Dimensions of V-Belt ?




Classic V-Belt

Cross Section	A	B	C	D	E	F
Top (mm)	13	17	22	32	38	50
Height (mm)	8	11	14	19	23	30
Angle (°)	40°	40°	40°	40°	40°	40°




Wedge V-Belt

Cross Section	SPZ	SPA	SPB	SPC	5V	8V
Top (mm)	10	13	17	22	16	25.5
Height (mm)	8	10	14	18	13.5	23
Angle (°)	40°	40°	40°	40°	40°	40°



Banded V-Belt


Cross Section	HB	HC	HD	HE	HSPB	HSPC	H8V
Top (mm)	17	22	32	38	17	22	25.5
Height (mm)	14.5	17.5	22.5	26.5	17.5	21.5	26.5
Angle (°)	40°	40°	40°	40°	40°	40°	40°



Pentagonal V-Belt

Top Width	Top Height	Bottom Height	Angle (°)
22 mm	13.5 mm	14 mm	40°

	Belt Designation	Cross Section		Small Pulley Diameter (mm)
		Top Width (mm)	Height (mm)	
Classic V-Belt	A	13	8	71
	B	17	11	112
	C	22	14	180
	D	32	19	355
	E	38	23	500
	F	50	30	700
Wedge V-Belt	SPZ	10	8	63
	SPA	13	10	90
	SPB	16	13	140
	SPC	22	18	224
	8V	25.5	23	335

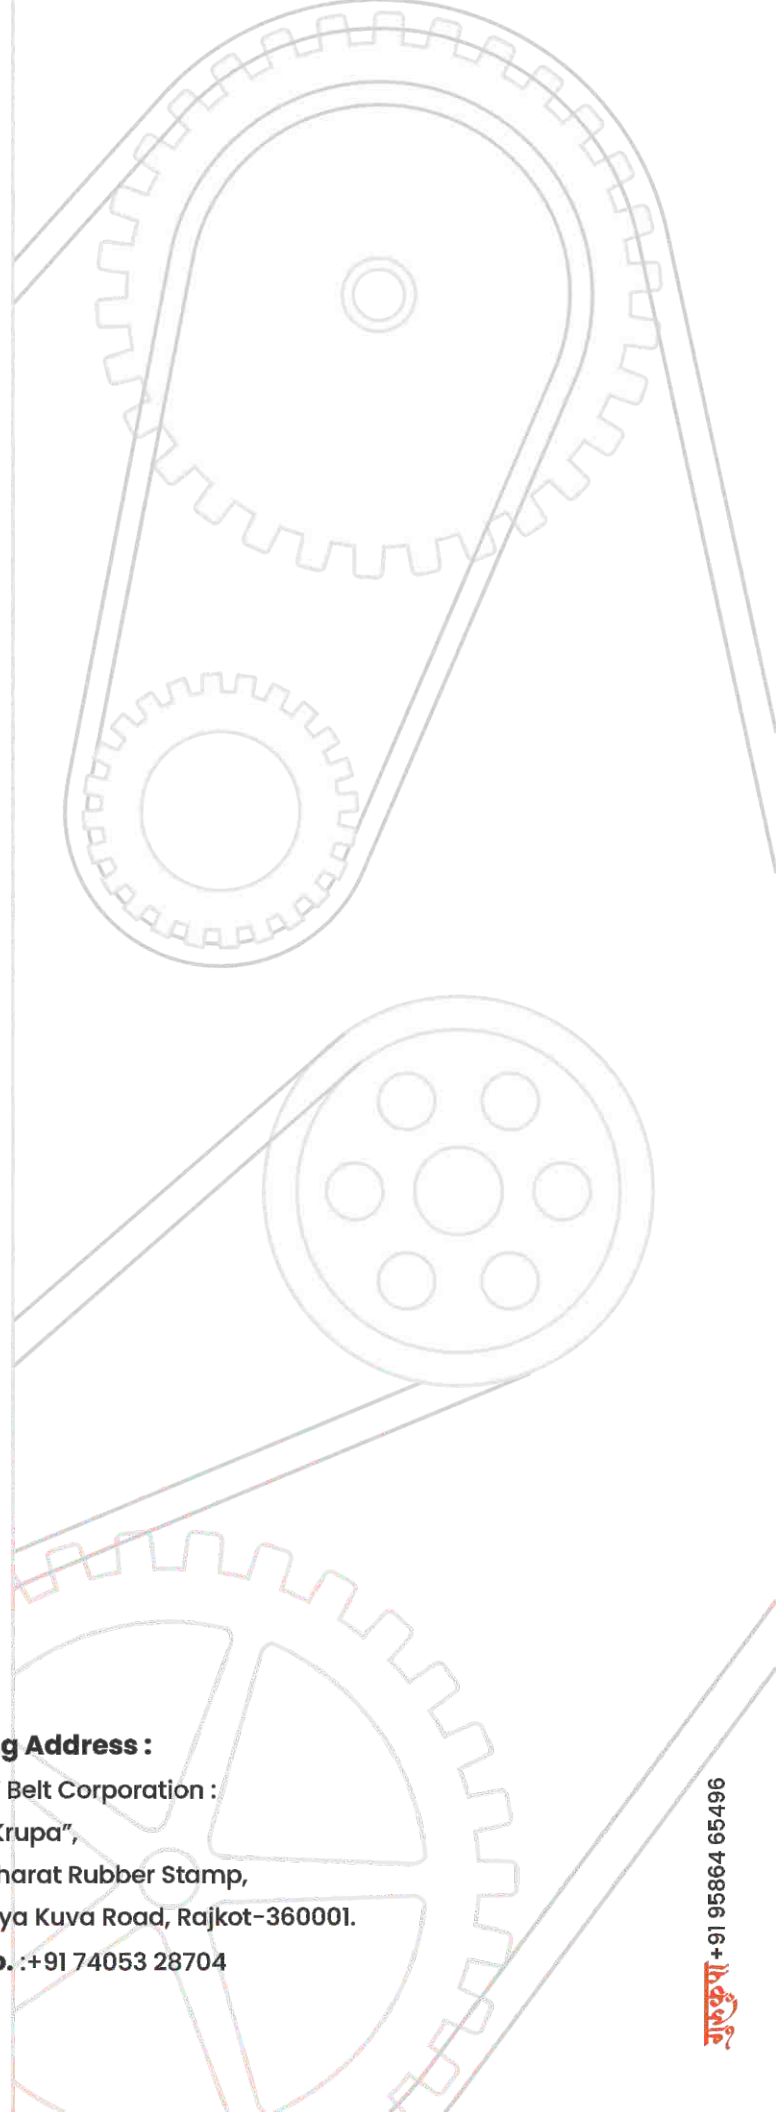

Contact Us

Patel Transmission

Factory Address

Plot No. 14-15, Shubh Ind. Zone,
Makhavad Chowkdi, Makhavad,
Khambha Road, Ta-Lodhika,
At-Khambha, Dist-Rajkot(Guj-Ind)-360311.

Mo. no. : +91 93288 19986

Mail id : pateltransmission2020@gmail.com

Mailing Address :

Patel V Belt Corporation :
"Ram Krupa",
Opp. Bharat Rubber Stamp,
Garediya Kuva Road, Rajkot-360001.

Mo. no. : +91 74053 28704

KASHISH KORPORATION

"SHRI HARI KRUPA ", AMIDHARA AVENUE-1, NR.SHANTINIKETAN RESIDENCY,
NR. ALAP GREEN CITY, RAIYA ROAD, RAJKOT-360007(GUJARAT)
Mob. 84600 64933, 99742 65556 E-mail : kashishkorporation@gmail.com

PRICE LIST

W.E.F. 01 / 01 / 2024

SR. NO.	PRODUCT	PACKING	BASIC RATE	CONTAINER	QUANTITY
1	BAJAJ CHETAK AP-3 GREASE	250 Gm.	1720	40 NOS	10 Kg.
		500 Gm.	1980	24 NOS	12 Kg.
		1 Kg.	1980	12 NOS	12 Kg.
		2 Kg.	1980	6 BUCKET	12 Kg.
		3 Kg.	1980	4 BUCKET	12 Kg.
		5 Kg.	1580	2 BUCKET	10 Kg.
		10 Kg.	1580	1 BUCKET	10 Kg.
		18 Kg.	2280	1 BUCKET	18 Kg.
		180 Kg.	*	1 DRUM	180 Kg.
2	BAJAJ LUBE SEMI - LITHIUM GREASE (WHITE / RED)	250 Gm.	1800	40 NOS	10 Kg.
		500 Gm.	2050	24 NOS	12 Kg.
		1 Kg.	2050	12 NOS	12 Kg.
		2 Kg.	2050	6 BUCKET	12 Kg.
		5 Kg.	1710	2 BUCKET	10 Kg.
		18 Kg.	2500	1 BUCKET	18 Kg.
		180 Kg.	*	1 DRUM	180 Kg.
3	GOLD BAJAJ AP - 3 GREASE	18 Kg.	1650	1 BUCKET	18 Kg.
4	SUPREMO BAJAJ AP - 3 GREASE & VIRGIN AP - 3 GREASE	50 Gm.	1070	200 POUCHES	10 Kg.
		100 Gm.	1030	100 POUCHES	10 Kg.
		200 Gm.	1030	50 POUCHES	10 Kg.
5	BAJAJ AP - 3 GREASE	100 Gm.	2000	100 TUBES	10 Kg.
		200 Gm.	2000	50 TUBES	10 Kg.
6	AP - 3 GREASE	14 Kg.	1400	1 TIN DABA	14 Kg.
7	BAJAJ CHASIS GREASE	250 Gm.	1560	40 NOS	10 Kg.
		500 Gm.	1780	24 NOS	12 Kg.
		1 Kg.	1780	12 NOS	12 Kg.
		2 Kg.	1780	6 BUCKET	12 Kg.
		5 Kg.	1510	2 BUCKET	10 Kg.
		18 Kg.	2000	1 BUCKET	18 Kg.
		180 Kg.	*	1 DRUM	180 Kg.
8	BAJAJ KING CHASIS GREASE	18 Kg.	1450	1 BUCKET	18 Kg.
9	BAJAJ APLR LONG LIFE GREASE	250 Gm.	2750	40 Nos.	10 Kg.
		500 Gm.	3130	24 NOS.	12 Kg.
		1 Kg.	3130	12 NOS.	12 Kg.
		2 Kg.	3130	6 BUCKET	12 Kg.
		3 Kg.	3130	4 BUCKET	12 Kg.
		5 Kg.	2650	2 BUCKET	10 Kg.
		18 Kg.	4450	1 BUCKET	18 Kg.
		180 Kg.	*	1 DRUM	180 Kg.
10	BAJAJ SYNTHETIC RED GEL NLGI 2.5 GREASE	500 Gm.	3600	24 NOS.	12 Kg.
		1 Kg.	3600	12 NOS.	12 Kg.
		2 Kg.	3600	6 BUCKET	12 Kg.
		3 Kg.	3600	4 BUCKET	12 Kg.
		5 Kg.	3000	2 BUCKET	10 Kg.
		18 Kg.	*	1 BUCKET	18 Kg.